



Donaldson.
FILTRATION SOLUTIONS

Process Filtration From Pure to Sterile

(P)-SM N

MAIN FEATURES & BENEFITS:

- High dirt holding capacity at low differential pressure and high flow rate
- Highly durable stainless steel design
- Regenerable by ultrasonication or backflushing
- For the filtration of air, steam and liquids
- Approved for Food Contact Use acc. to CFR Title 21 & 1935/2004/EC



INDUSTRIES:



- Chemical Industry



- Food & Beverage



- Paint



- Environmental Industry



- Pharmaceutical Industry

Donaldson Filtration Deutschland GmbH
Büssingstr. 1
42781 Haan (Germany)
Phone: +49 (0) 2129 569 0
Fax: +49 (0) 2129 569 100
E-mail: IFS-de@donaldson.com
Web: www.donaldson.com

Donaldson.
Ultrafilter

PRODUCT DESCRIPTION

The (P)-SM N filter element consists of a regenerable, pleated filter matrix with stainless steel outer guard and end caps. The retention rate extends from 1 µm nominal up to 250 µm nominal in water.

The (P)-SM N filter element offers an exceedingly economical pre- and final filtration, where the stainless steel filter matrix can be regenerated by ultrasonication or backflushing. This is especially important at higher particle loads.

The heavy-duty construction of the (P)-SM N filter is also suitable for high-viscosity liquids and can withstand a differential pressure of up to 5 bar (flow from outside to inside). In addition, the filter can be used for temperatures up to 200°C.

All components meet the USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21. The filter element is manufactured in accordance with the manufacturing requirements, has no migration of filter media and is non-fibre releasing.

The (P)-SM N stainless steel filter is designed and developed for the following applications:

Liquid Filtration

- Water filtration
- Chemicals
- Solvents
- Pharmaceutical industry
- Food and beverage
- Syrup
- Cosmetics
- Paints
- Salt- and Seawater
- Coolants

Gas Filtration

- Compressed air
- Carbon dioxide
- Nitrogen
- Tank Ventilation
- Highly aggressive gases

Steam Filtration

PRODUCT SPECIFICATIONS

Product Specifications

Filtration Surface:

- 0,25 m² per 250 mm element (10")
- For other element sizes see correction factor CF in section "Available end cap configurations"

Temperature Range:

- -50°C (-60°F) to 200°C (400°F)
- > 150°C (300°F) welded end caps only

**Maximum Differential Pressure:
(Flow Direction: Outside to Inside)**

- 5 bar (75 psid), independent of the system pressure or temperature

RETENTION RATES

Filter Rating (water)	Filter Rating (water)					
	1 µm	5 µm	25 µm	50 µm	100 µm	250 µm
Nominal (~ 98 %)	1 µm (~95%)	4 µm	15 µm	40 µm	60 µm	200 µm
Absolute (> 99,98 %)	4 µm	5 µm	25 µm	60 µm	100 µm	250 µm

Retention Rates (Air, 20 °C, 90 Nm³/h, 10/30 Element)

Pore Size [µm]	98 % [µm]	>99,9 % [µm]	Thickness [mm]
1	0,3	< 1	0,37
5	1	< 5	0,35
25	15	25µm	0,17

MATERIAL COMPLIANCE USA

All components of the (P)-SM N filter element are FDA listed for food contact use in the **Code of Federal Regulations (CFR), Title 21.**

Filter Materials	CFR Title
Filter Matrix:	Stainless Steel 1.4301 211.65
End Caps:	Stainless Steel 1.4301 211.65
Bonding Materials:	Plastic Steel 177.2450
	Silicone 177.2600
O-Rings:	Silicone 177.2600
Alternatively:	Buna 177.2600
	EPR 177.2600
	PTFE over silicone 177.1550
	PTFE over viton 177.1550

All products have been inspected and released by Quality Assurance as having met the following requirements:

- All filters are fabricated without the use of binders, adhesives, additives or surface-active agents.
- All filter components based on plastics are non-toxic and are certified bio-safe in accordance with current USP Class VI Tests for Plastic.

MATERIAL COMPLIANCE EU


The Donaldson (P)-SM N filter element is available with a silicone-based bonding material which meets the guideline for Food Contact Use as given in **European Regulation (EC) Number 1935/2004.**

This specific element is suited for Food Contact Use since all components meet the requirements of the 1935/2004/EC for materials and products intended to come in contact with food stuff (excluding o-rings).


For specific details on the O-rings, please contact your Donaldson Sales Engineer.

FLOW CHARACTERISTICS

(P)-SM, 10", Deionised water, 25°C

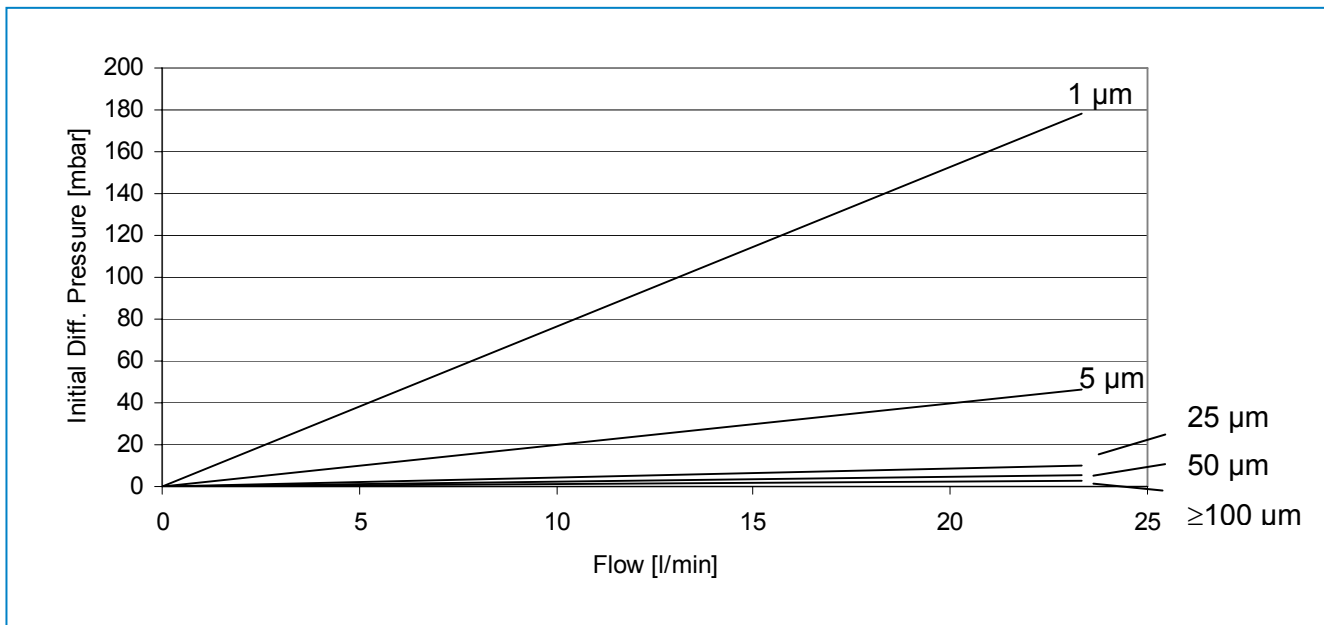


(P)-SM, 10", air, 25°C, 1 bar absolute

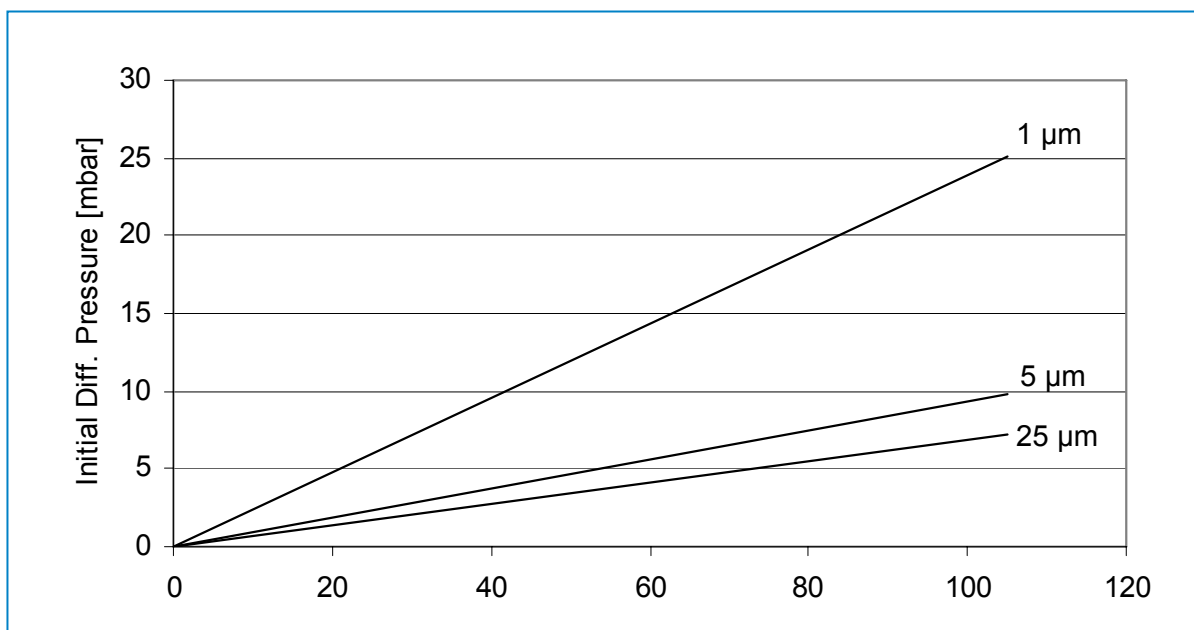

AVAILABLE END CAP CONFIGURATIONS

Dimensions (CODE 7 connection):


CODE 7						
Size	a		b		c	
	mm	inch	mm	inch	mm	inch
5"	128	5,04	142	5,59	56,5	22,2
10"	250	9,84	315	12,40	56,5	2,22
20"	500	19,68	585	22,24	56,5	2,22
30"	750	29,53	815	32,08	56,5	2,22

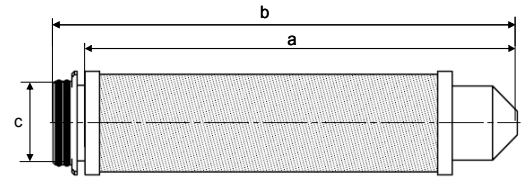

CODE 7: 2 x 226 o-rings, bayonet 2 locking tabs, locating fin

Dimensions (uf plug connection):

uf – plug Connection							
Size	a		b		C*		CF**
	mm	inch	mm	inch	mm	inch	
03/10	76	2,99	87	3,42	30	1,18	0,12
04/20	104	4,09	118	4,64	37	1,46	0,19
05/20	128	5,04	142	5,59	37	1,46	0,25
05/30	128	5,04	144	5,67	61	2,40	0,46
07/30	180	7,08	196	7,71	61	2,40	0,68
10/30	254	10	270	10,63	61	2,40	1,00
15/30	381	15	397	15,63	61	2,40	1,55
20/30	510	20	526	20,63	61	2,40	2,10
30/30	764	30	780	30,63	61	2,40	3,28
30/50	764	30	780	30,63	89	3,50	5,89

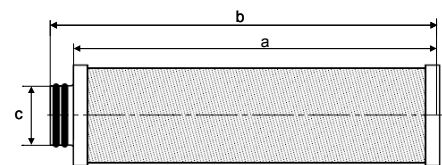

* Plug- type connection with double-o-ring

** Correction Factor Filtration Surface & Flow Rate

Other end cap configurations on request.

Technical alterations reserved 04/2009

- For information on integrity test equipment or integrity test services, please contact your Donaldson Sales Engineer and visit our website at www.donaldson.com!

